

S

Thermal protection

$U = 0,15 \text{ W/(m}^2\text{K)}$

GEG 2020/24 Bestand*: $U < 0,24 \text{ W/(m}^2\text{K)}$




Moisture proofing

No condensate



Heat protection


Temperature amplitude damping: 14
phase shift: 10,2 h
Thermal capacity inside: 20 kJ/m²K

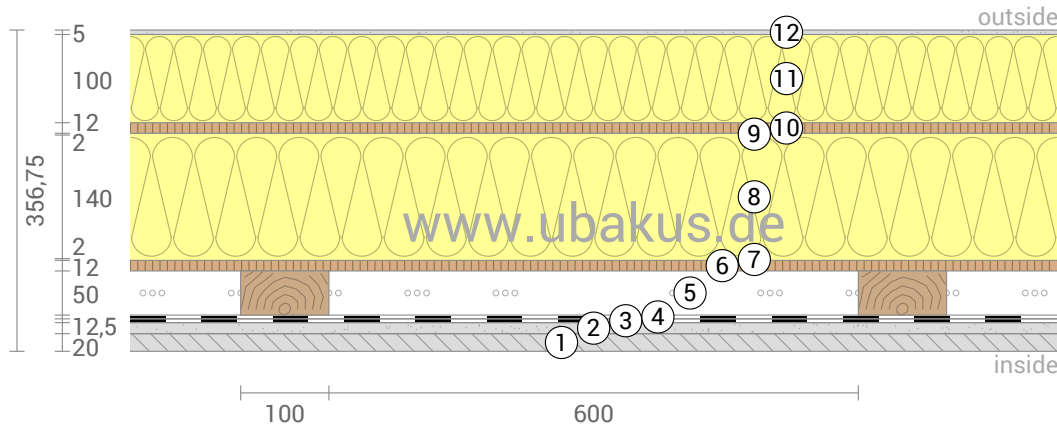

- | | | |
|---------------------------|---------------------------------|------------------------------------|
| ① Cement screed (20 mm) | ⑤ Rear ventilated level (50 mm) | ⑨ Polyurethane foam (2 mm) |
| ② Gypsum board (12,5 mm) | ⑥ OSB/3 (12 mm) | ⑩ OSB/3 (12 mm) |
| ③ Foil, EPDM | ⑦ Polyurethane foam (2 mm) | ⑪ ROCKWOOL Fixrock 035 VS (100 mm) |
| ④ pro clima INTELLO® PLUS | ⑧ Austrotherm EPS F (140 mm) | ⑫ Lime render (5 mm) |

Impact of each layer and comparison to reference values


For the following figure, the thermal resistances of the individual layers were converted in millimeters insulation. The scale refers to an insulation of thermal conductivity 0,040 W/mK.

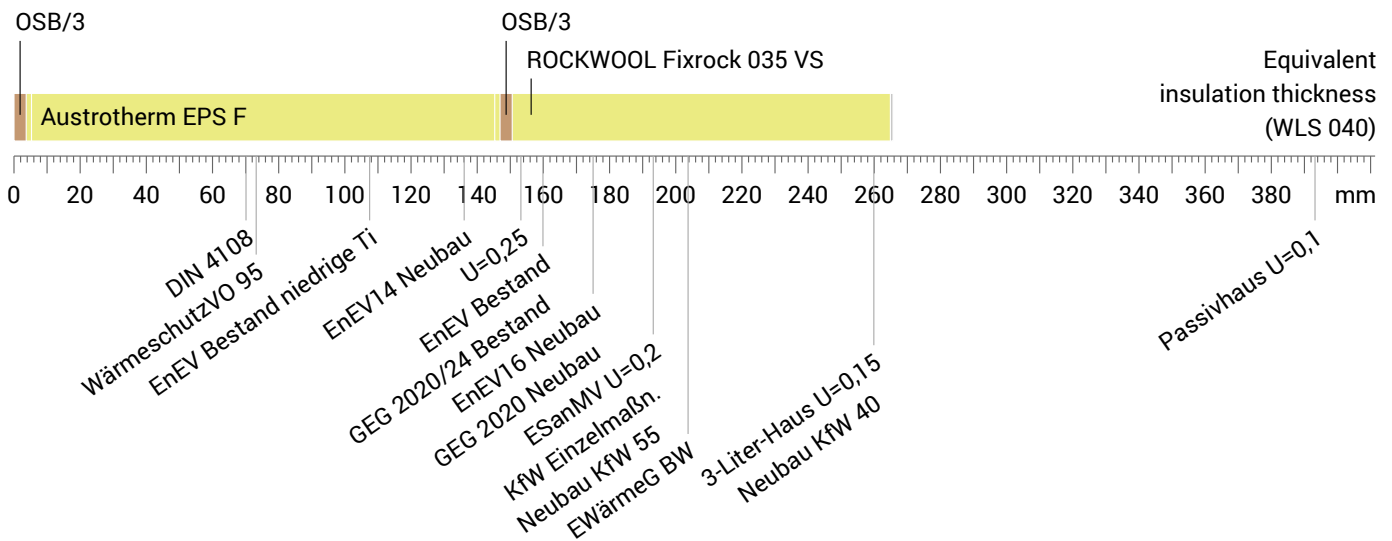

Inside air :	20,0°C / 50%	Thickness:	35,7 cm
Outside air:	-5,0°C / 80%	Weight:	82 kg/m ²
Surface temperature.:	19,1°C / -4,9°C	Heat capacity:	39 kJ/m ² K
	sd-value: 14,2 m		

$s, U=0,15 \text{ W}/(\text{m}^2\text{K})$

Temperature profile

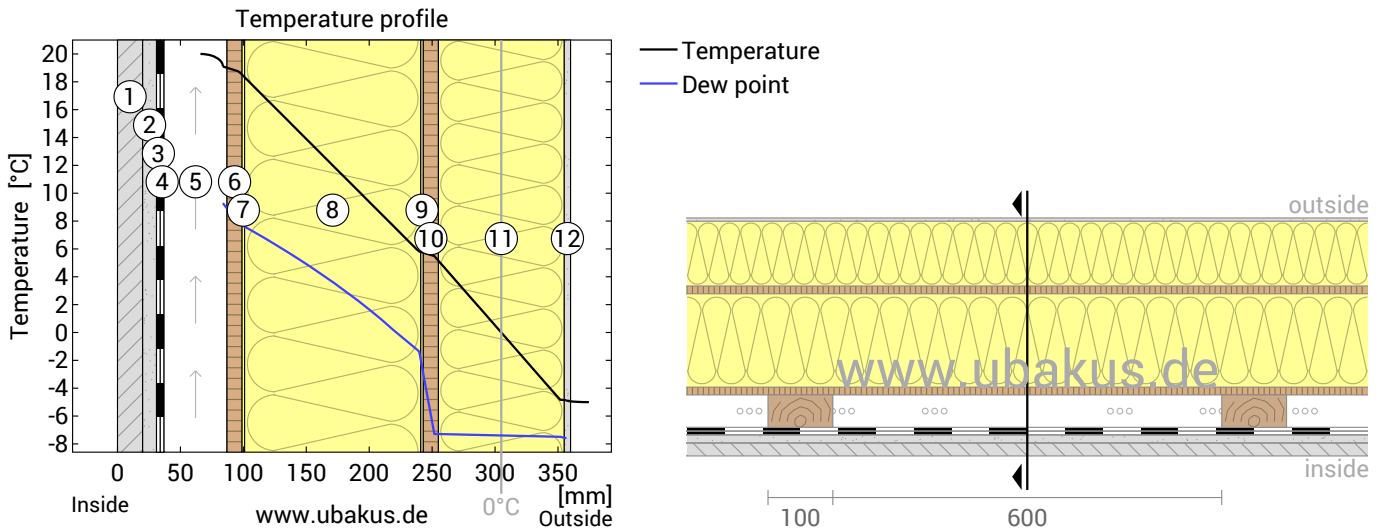

- | | | |
|---------------------------|---------------------------------|------------------------------------|
| ① Cement screed (20 mm) | ⑤ Rear ventilated level (50 mm) | ⑨ Polyurethane foam (2 mm) |
| ② Gypsum board (12,5 mm) | ⑥ OSB/3 (12 mm) | ⑩ OSB/3 (12 mm) |
| ③ Foil, EPDM | ⑦ Polyurethane foam (2 mm) | ⑪ ROCKWOOL Fixrock 035 VS (100 mm) |
| ④ pro clima INTELLO® PLUS | ⑧ Austrotherm EPS F (140 mm) | ⑫ Lime render (5 mm) |

Left: Temperature and dew-point temperature at the place marked in the right figure. The dew-point indicates the temperature, at which water vapour condensates. As long as the temperature of the component is everywhere above the dew point, no condensation occurs. If the curves have contact, condensation occurs at the corresponding position.

Right: The component, drawn to scale.

Layers (from inside to outside)

#	Material	λ [W/mK]	R [m ² K/W]	Temperatur [°C]		Weight [kg/m ²]
				min	max	
1	2 cm Cement screed			20,0		40,0
2	1,25 cm Gypsum board			20,0		8,5
3	0,1 cm Foil, EPDM			20,0		1,2
4	0,025 cm pro clima INTELLO® PLUS			20,0		0,1
5	5 cm Rear ventilated level (room air)			20,0		0,0
	Thermal contact resistance*		0,130	19,1	20,0	
6	1,2 cm OSB/3	0,130	0,092	18,8	19,1	7,4
7	0,2 cm Polyurethane foam (PU)	0,050	0,040	18,6	18,8	0,1
8	14 cm Austrotherm EPS F	0,040	3,500	6,0	18,6	2,1
9	0,2 cm Polyurethane foam (PU)	0,050	0,040	5,8	6,0	0,1
10	1,2 cm OSB/3	0,130	0,092	5,5	5,8	7,4
11	10 cm ROCKWOOL Fixrock 035 VS	0,035	2,857	-4,8	5,5	4,7
12	0,5 cm Lime render	0,870	0,006	-4,9	-4,8	7,0
	Thermal contact resistance*		0,040	-5,0	-4,9	
35,675 cm Whole component			6,797			81,9

*Thermal contact resistances according to DIN 6946 for the U-value calculation. Rsi=0,25 and Rse=0,04 according to DIN 4108-3 were used for moisture proofing and temperature profile.

Surface temperature inside (min / average / max):	19,1°C	19,1°C	19,1°C
Surface temperature outside (min / average / max):	-4,9°C	-4,9°C	-4,9°C

s, U=0,15 W/(m²K)

Moisture proofing

For the calculation of the amount of condensation water, the component was exposed to the following constant climate for 90 days: inside: 20°C und 50% Humidity; outside: -5°C und 80% Humidity. This climate complies with DIN 4108-3.


This component is free of condensate under the given climate conditions.

#	Material	sd-value [m]	Condensate [kg/m ²] [Gew.-%]	Weight [kg/m ²]
6	1,2 cm OSB/3	1,80	- -	7,4
7	0,2 cm Polyurethane foam (PU)	0,12	-	0,1
8	14 cm Austrotherm EPS F	8,40	-	2,1
9	0,2 cm Polyurethane foam (PU)	0,12	-	0,1
10	1,2 cm OSB/3	3,60	-	7,4
11	10 cm ROCKWOOL Fixrock 035 VS	0,10	-	4,7
12	0,5 cm Lime render	0,05	-	7,0
35,675 cm Whole component		14,19	0	81,9

Humidity

The temperature of the inside surface is 19,1 °C leading to a relative humidity on the surface of 53%. Mould formation is not expected under these conditions.

The following figure shows the relative humidity inside the component.

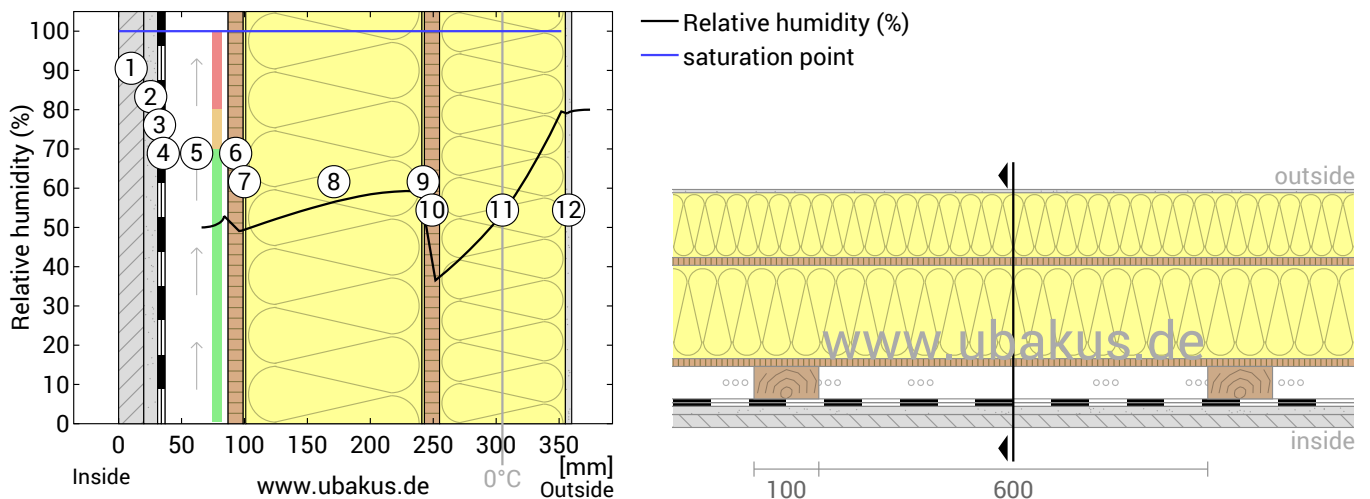



- | | | |
|---------------------------|---------------------------------|------------------------------------|
| ① Cement screed (20 mm) | ⑤ Rear ventilated level (50 mm) | ⑨ Polyurethane foam (2 mm) |
| ② Gypsum board (12,5 mm) | ⑥ OSB/3 (12 mm) | ⑩ OSB/3 (12 mm) |
| ③ Foil, EPDM | ⑦ Polyurethane foam (2 mm) | ⑪ ROCKWOOL Fixrock 035 VS (100 mm) |
| ④ pro clima INTELLO® PLUS | ⑧ Austrotherm EPS F (140 mm) | ⑫ Lime render (5 mm) |

Notes: Calculation using the Ubakus 2D-FE method. Convection and the capillarity of the building materials were not considered. The drying time may take longer under unfavorable conditions (shading, damp / cool summers) than calculated here.

s, U=0,15 W/(m²K)

Heat protection

The following results are properties of the tested component alone and do not make any statement about the heat protection of the entire room:

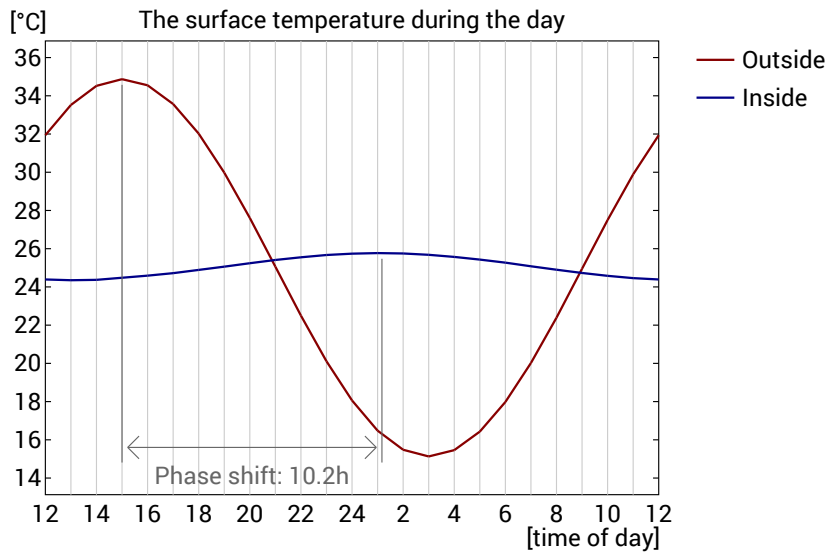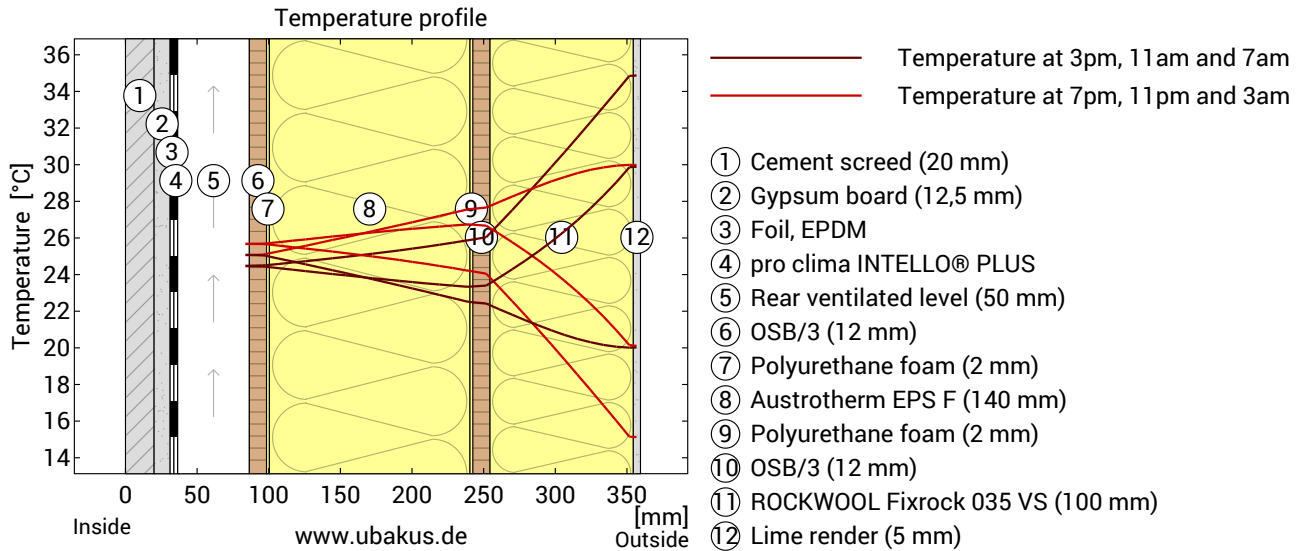

Top: Temperature profile within the component at different times. From top to bottom, brown lines: at 3 pm, 11 am and 7 am and red lines at 7 pm , 11 pm and 3 am.

Bottom: Temperature on the outer (red) and inner (blue) surface in the course of a day. The arrows indicate the location of the temperature maximum values . The maximum of the inner surface temperature should preferably occur during the second half of the night.

Phase shift*	10,2 h	Heat storage capacity (whole component):	39 kJ/m²K
Amplitude attenuation **	13,9	Thermal capacity of inner layers:	20 kJ/m²K
TAV ***	0,072		

* The phase shift is the time in hours after which the temperature peak of the afternoon reaches the component interior.

** The amplitude attenuation describes the attenuation of the temperature wave when passing through the component. A value of 10 means that the temperature on the outside varies 10x stronger than on the inside, e.g. outside 15-35 °C, inside 24-26 °C.

*** The temperature amplitude ratio TAV is the reciprocal of the attenuation: TAV = 1 / amplitude attenuation

Note: The heat protection of a room is influenced by several factors, but essentially by the direct solar radiation through windows and the total amount of heat storage capacity (including floor, interior walls and furniture). A single component usually has only a very small influence on the heat protection of the room.

The calculations presented above have been created for a 1-dimensional cross-section of the component.